


UFL COMPATIBLE CABLE ASSEMBLIES



General Features

- Cable Diameter: available in 0.81mm, 1.13 mm, 1.32 mm, 1.37mm or 1.73 mm. cable
- Connector: UFL compatible connectors
- Cables with UFL connectors to SMA, FME, SMB, etc.
- Working Frequency Range: DC to 6 GHz
- VSWR: 1,30 maximum
- Impedance: 50 Ω Nominal
- Contact resistance: 20 m Ω
- Withstanding Voltage: 200 V AC/ 1minute
- Insulation Resistance: >500 M Ω min.
- Length cable: 50 to 400 mm
- Consult options with the Sales Office

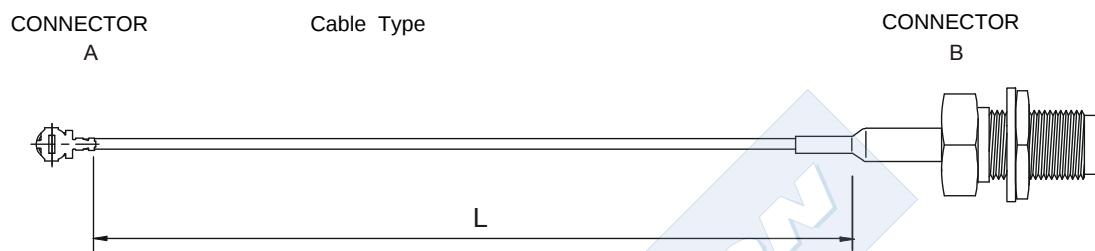

Cable Features				
Connector A	Connector B	Cable	Length L (mm.)	Part Number
UFL compatible	SMA Female bulkhead (10 mm.)	1.32 mm.	190 mm.	00-09-0195
UFL compatible	SMA Female bulkhead (10 mm.)	1.32 mm.	100 mm.	00-09-0196
UFL compatible	FME Male bulkhead	1.32 mm.	100 mm.	00-09-0197
UFL compatible	FME Male bulkhead	1.32 mm.	150 mm.	00-09-0201
Striped 2.5/8/1.8	Striped 2.5/8/1.8	0.81 mm.	100 mm.	00-09-0204
UFL compatible	SMA Female bulkhead (10 mm.)	1.32 mm.	400 mm.	00-09-0210
UFL compatible	UFL compatible	1.32 mm.	150 mm.	00-09-0232
UFL compatible	SMB Female bulkhead	1.13 mm.	160 mm.	00-09-0236
UFL compatible	SMA Female bulkhead (11.40 mm.)	1.32 mm.	110 mm.	00-09-0317
UFL compatible	SMA Female bulkhead (11.40 mm.)	1.32 mm.	160 mm.	00-09-0330
UFL compatible	SMA Female bulkhead (11.40 mm.)	1.37 mm.	230 mm.	00-09-0345
UFL compatible	Striped 2/1/2	1.13 mm.	120 mm.	00-09-0389
UFL compatible	UFL compatible	1.73 mm.	160 mm.	00-09-0415
UFL compatible	UFL compatible	1.73 mm.	230 mm.	00-09-0416
UFL compatible	UFL compatible	1.13 mm.	160 mm.	00-09-0430
UFL compatible	UFL compatible	1.73 mm.	100 mm.	00-09-0437
UFL compatible	Fakra I	1.13 mm.	190 mm.	00-09-0441
UFL compatible	Fakra D	1.13 mm.	320 mm.	00-09-0442
UFL compatible	Fakra E	1.13 mm.	220 mm.	00-09-0443
UFL compatible	Fakra H	1.13 mm.	170 mm.	00-09-0444
UFL compatible	Fakra C	1.13 mm.	230 mm.	00-09-0445
UFL compatible	Fakra M	1.13 mm.	230 mm.	00-09-0446
UFL compatible	FME Male	1.37 mm.	150 mm.	00-09-0450
UFL compatible	SMA Female bulkhead (11.40 mm.)	1.37 mm.	150 mm.	00-09-0508
UFL compatible	SMA Female bulkhead (11.40 mm.)	1.37 mm.	230 mm.	00-09-0509
UFL compatible	FME Male	1.37 mm.	210 mm.	00-09-0546
UFL compatible	UFL compatible	1.73 mm.	50 mm.	00-09-0560