

SINGLE ROW VERTICAL PIN HEADER



3987 SERIES. 3.96 mm (0.156") pitch.


General Features

- Available in 1 through 20 circuits
- Mates with PCB sockets 3.96mm pitch 3970, 3971, 3972, 3915, 3916; Wire housing 3940, 3930, 2631 and 3950 series
- 1.14 mm. square pin with different pin length
- Pin omit options are available in any circuits
- With standoff to minimise flux retention
- Easy breakaway desired circuit size


Materials

- Insulator: Glass filled Polyester UL 94 V-0
- Contact: brass
- Operating temperature: -40°C to +85°C
- RoHS compliant

Dimensional Information

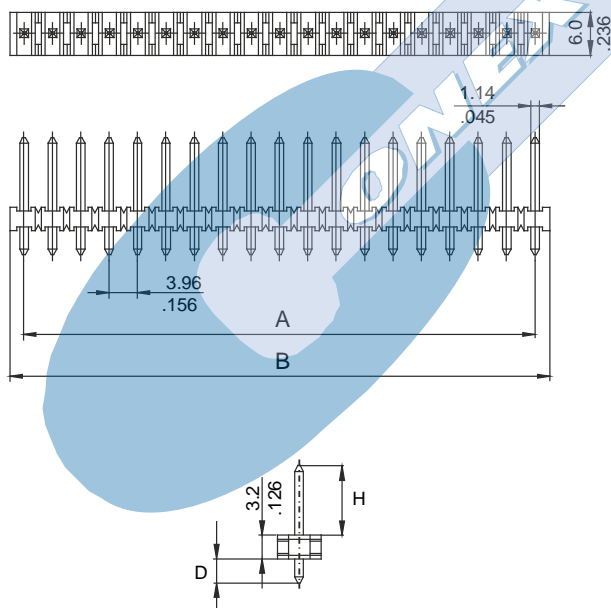

RECOMMENDED HOLE PATTERN



Dimensions: (In mm.)

A = 3.96 x (XX*-1)

B = 3.96 x (XX*)


* XX (Number of circuits)

Electrical Features

- Voltage rating: < 250V
- Current rating: < 5 A
- Contact resistance: < 20 mΩ
- Dielectric withstanding voltage: 1500 V AC/minute
- Insulation resistance: >1000 MΩ

Mechanical Features

- Pin retention force to insulator: > 0,50 Kg
- Durability: 25 cycles

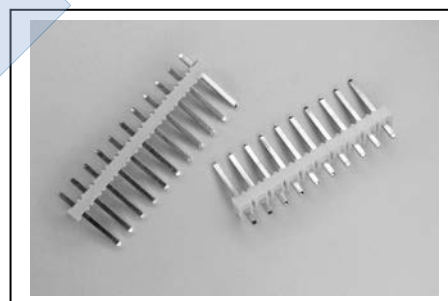

Ordering Information:

3987 - T- XX- C
1 2 3 4

1. Connector Series

2. (T) Contact Plating

- T = 2. Tin plated
Recommended Finish

3. (XX) Number of circuits

- Available in 1 through 20 circuits

5. (C) Pin Dimensions

- C = 1. Dim. H = 10.25 mm. D = 3.50 mm.
- C = 2. Dim. H = 17.10 mm. D = 3.50 mm.
- C = 3. Dim. H = 23.20 mm. D = 3.50 mm.
- C = 4. Dim. H = 14.00 mm. D = 13.90 mm.