

DUAL ROW SMT VERTICAL PIN HEADER



8357 SERIES. 1.27 mm. (0.050") pitch. Machined contact.





General Features

- Available in 4 through 80 circuits
- Mates with sockets 1.27mm. pitch 8361, 8364 and 8367 series
- 0.41 round pin in contact area with different plating

Materials

- Insulator: PPS black + 30% GF UL 94 V-0
- Contact: Brass
- Operating temperature. -40°C to +105°C
- RoHS compliant

Dimension Information

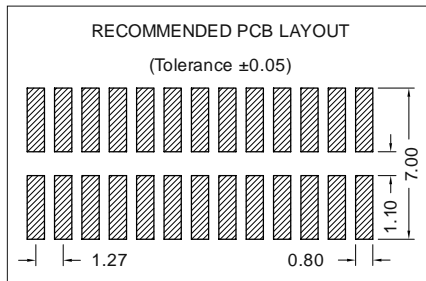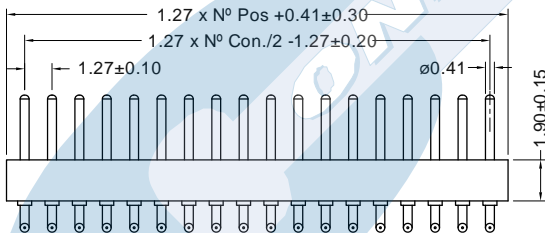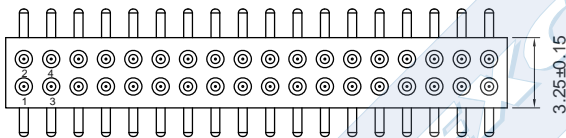


Electrical Features

- Voltage rating: < 100V
- Current rating: < 1 A
- Contact resistance: < 10 mΩ
- Dielectric withstanding Voltage: 1000 V AC/minute
- Insulation resistance: >1000 MΩ

Mechanical Features

- Durability: 500 Cycles

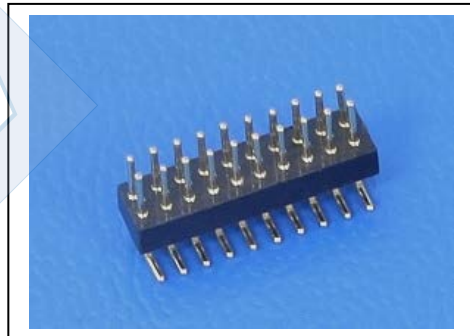

Ordering Information:

8357 - T- XX- 1 E

1 2 3 4 5

1. Connector Series

2. (T) Contact Plating

- T = 3. Gold flash over 30-50μ" Ni overall
Recommended Finish
- T = 15. 15μ" selec. gold over 30-50μ" Ni overall
- T = 16. 30μ" selec. gold over 30-50μ" Ni overall

3. (XX) Number of circuits

- Available in 4 through 80 circuits

5. (E) Packing Options

- E = 1. Tube + Pad
- E = 2. Reel + Pad

DIMENSIONS:

$$A = 1.27 \left(\frac{XX}{2} - 1 \right) \quad B = 1.27 \left(\frac{XX}{2} \right) + 0.41$$

XX = Number of circuits